

ZONEK.X

Power LED



- Product Certification Marking**
- IP**
- Ambiant Temp.**
- Standarts**
- Cable Entries**
- Body**
- Difusser**
- Gaskets**
- Paint**
- Circuit**
- Rated Voltage**
- Frequency**
- Application**

Aluminium Body Led Projector
 SCA 20 ATEX V008X
 II 3G Ex ec IIC T4 Gc
 II 3D Ex tc IIIC T100°C Dc
 IP 66
 -20 °C up to +50 °C
 EN60079-0: 2018; EN60079-1: 2014; EN60079-31: 2014
 2 x 1/2"
 Low Cooper Aluminium Alloy
 Shock and high temperature tempered glass
 NBR oring on covers and high temp. res. silicone for glass
 Electrostatic Powder Coat
 Meanwell Driver and Samsung/Osram Led
 100-240V
 47/63 Hz
 Oil refineries, Chemical and petrochemical plants, Boiler rooms etc.

ZONE 2 - 22


IP 66

-20 °C < T_a < +50°C

included technology



DIMENSIONAL DRAWING

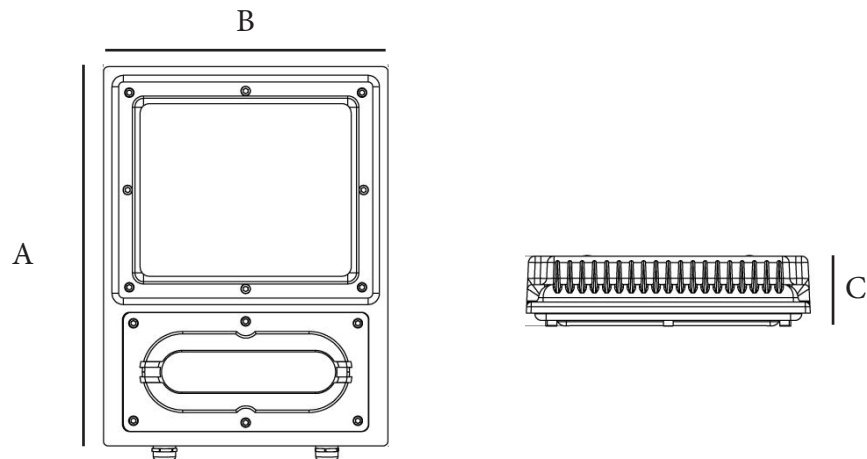

	A	B	C	Lumens	Power	weight (kg)
ZNK 35	305	205	70	~ 4800 lm	35w	5,4 kg
ZNK 50	305	205	70	~ 7040 lm	50w	5,4 kg
ZNK 75	305	205	70	~ 10400 lm	75w	5,4 kg
ZNK 100	400	300	75	~ 13500 lm	100w	9 kg
ZNK 125	400	300	75	~ 17000 lm	125w	9 kg
ZNK 150	400	300	75	~ 20500 lm	150w	9 kg
ZNK 180	400	300	75	~ 24500 lm	180w	9 kg



ZNK.

35W
50W
80W
100W
125W
150W
180W

Empty for Wall or Ceiling Bracket
P for Pendant or Pole Mounting

