

# ZNB.CS



0-1  
1-0-2  
0-1-2





ZONE 1-2 / 21-22

IP 65

$-25\text{ }^{\circ}\text{C} < T_a < +55\text{ }^{\circ}\text{C}$

Product	Aluminium Body Junction Boxes
Certification	SCA 20 ATEX 068X
Marking	II 2G Ex db IIB T6 Gb II 2D Ex tb IIIC T85°C Db
IP	IP 65
Ambiant Temp.	-25 °C up to +55 °C
Standarts	EN60079-0: 2018; EN60079-1: 2014; EN60079-31: 2014
Cable Entries	2X1/2" or 2x3/4"
Body	Low Cooper Aluminium Alloy
Gaskets	NBR o-ring on Body
Paint	Electrostatic Powder Coat
Rated Voltage	24-220V
Frequency	50/60 Hz
Application	Oil refineries, Chemical and petrochemical plants, Boiler rooms etc.

## DIMENSIONAL DRAWING

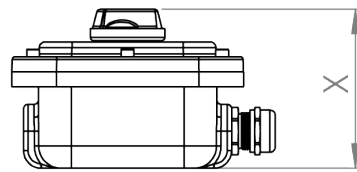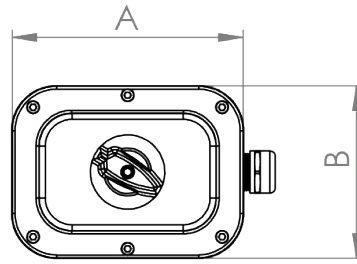

	External		Equipments	Information
	A	B	x	
ZNB-CS.S	156	116	105	0-1 Switches
ZNB-CS.M	156	116		1-0-2 Pole Changer
ZNB-CS.K	156	116		0-1-2 Commutator
ZNB-CS.L	156	116		0-1-2 Step Switch

ZNB-CS

See Information  
Columns

